

History of Insulation with Masonry

HIGHER ENERGY COSTS AND CODES DEMAND GREATER EFFICIENCY

BY CHARLES OSTRANDER, PE AND JONATHAN SATKO

There is a story of a young architect today analyzing a building constructed in the 1950s with solid masonry walls and single paned glass used on the exterior of the structure. That young architect referred to the building as an “old, masonry, energy inefficient building.” In the present context of the 21st century, it is not energy efficient using today’s standards. But, when it was built, as with most other buildings at that time, very little insulation was used because energy was a cheap commodity and architects and owners did not require use of insulation in their building envelopes.

Insulation and other techniques for energy conservation are coming to the fore today. Therefore, masonry buildings and other building types have been upgraded with different types of insulations. The

use (in the 1950s and 1960s) of zonolite, vermiculite and perlite was used initially in the cores of concrete masonry units and wall cavity’s to increase the masonry’s marginal thermal performance. This satisfied the increased energy demands. In the earlier part of the 20th century, some insulation materials utilized on the inside of ice houses built in Chicago were horse hair and cork

CAVITY WALL HISTORY: 200 YEARS

Cavity walls are not new, they have been observed in ancient Greek and Roman structures. At the Greco-Roman town of Pergamum, on the hills overlooking the Turkish town of Bergama, a stone wall of cavity type construction still exists.

Sometime in the early part of the 19th century, the cavity wall was rediscovered by the British. Plans dating as early as 1805 suggest a type of cavity wall construction. It featured two leaves (wythes) of brick, bonded by brick headers, spanning across a 6" cavity. An early British publication (dated 1821) suggests the use of cavity walls as a means of protection against moisture penetration. The use of metal ties was introduced in Southern England sometime after 1850. These original ties were made of wrought iron.

Cavity walls were first built in the United States late in the 19th century. Figure 1 illustrates an alternate type of cavity wall system originally featured in an 1899 text book assembled for people engaged in the engineering professions and construction trades. However, it was not until 1937 that this type of construction gained official acceptance by any building or construction agency in the United States. Since then, interest in and use of cavity walls in this country has rapidly increased. This has resulted in extensive testing to determine cavity wall properties and performance.

IN THE EARLIER PART OF THE 20TH CENTURY, SOME INSULATION MATERIALS UTILIZED ON THE INSIDE OF ICE HOUSES BUILT IN CHICAGO WERE HORSE HAIR AND CORK.

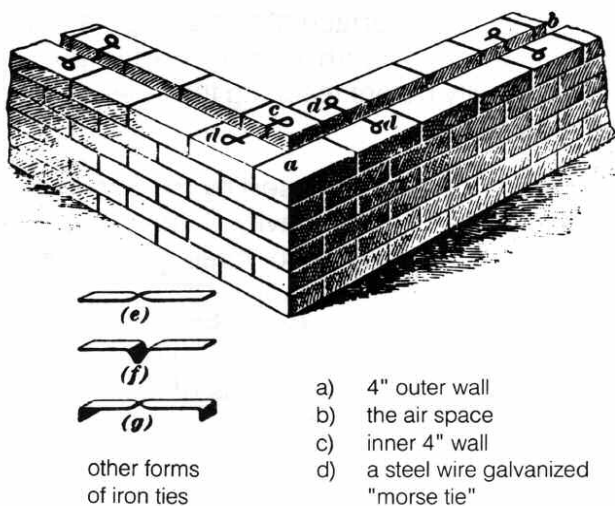


Figure 1. Cavity wall from, "Masonry-Carpentry-Joinery, The Art of Architecture, Engineering and Construction 1899

Batt Insulation

Unfaced thermal batt insulation complies with ASTM C665, Type I and ASTM E136. Kraft-faced thermal batt insulation complies with ASTM C665, Type II, Class C. Foil-faced thermal batt insulation complies with ASTM C665, Type III, Class B and C.

NOMINAL FRAMING DEPTH AND SPACING	"LABELED" BATT INSULATION R-VALUE (BETWEEN STEEL STUDS)	"EFFECTIVE" R-VALUE WITH BATT INSULATION AND STEEL STUDS	WALL THERMAL EFFICIENCY (1)
4" @ 16" oc	R-11	5.5	50%
	R-13	6.0	46%
	R-15	6.4	43%
4" @ 24" oc	R-11	6.6	60%
	R-13	7.2	55%
	R-15	7.8	52%
6" @ 16" oc	R-19	7.1	37%
	R-21	7.4	35%
6" @ 24" oc	R-19	8.6	45%
	R-21	9.0	43%

(1) — Data Source: ASHRAE/EIS Standard 90.1 — 1999, Appendix A.

The early use of cavity walls in this country was limited primarily to exterior load-bearing walls in low rise construction. In the 1940s, designers began to recognize the advantages of cavity walls in high-rise buildings. Today, masonry cavity walls are the preferred wall system and are used extensively throughout the United States in all types of buildings. The primary reasons for their popularity are: superior resistance to rain penetration, excellent thermal properties, excellent resistance to sound transmission and high resistance to fire.

At the first North American Masonry Conference (1978), at the University of Colorado Boulder, masonry design professionals and research professors gathered from around the world for paper presentations and discussion. Water penetration and solid masonry walls were being discussed along with the now more accepted insulated cavity wall currently being designed and constructed in America.

Timber West, an elder scholar from England, who had an Albert Einstein white head of hair and a white handle bar mustache, addressed the crowd. He cleared his throat and said, "When are you bloody Colonialists going to learn that if you want to build brick masonry walls that won't leak, you have to build a cavity wall. We (British) have been doing it for the last 200 years..." He silenced the audience.

MODERN ERA OF INSULATED MASONRY WALLS

The insulation used in masonry buildings changed drastically in the mid 70s due to the Arab oil embargo. Long lines of cars waiting to get gas along with increased energy demands promulgated new energy codes — this phenomenon changed the design world. Requirements for minimum R-values for various types of construction came into being. Masonry, concrete and precast industries were given credit for their mass in tempering the exterior temperature fluctuation. To meet these needs, a variety of insulations were used.


- BATT INSULATION
- EXPANDED POLYSTYRENE
- EXTRUDED POLYSTYRENE
- PHENOLIC FOAM
- POLYISOCYNAURATE INSULATION

Thermal batts are flexible, fiberglass insulation. It is made in R-values from 11 to 38. The product is manufactured in thicknesses from 3 1/2" to 12". The batts must be kept dry to maintain the stated R-values. Insulation that has become wet should be inspected for evidence of residual moisture and contamination, and any insulation that is contaminated should be promptly removed and replaced. Batt insulation's R-value is adversely affected by the presence of moisture. Due to thermal bridging, with just batt insulation between steel studs, a wall's thermal efficiency is lowered 50% to 65%.

MiTILite


Consistency • Durability • Workability

Over 25% lighter than standard conventional weight block

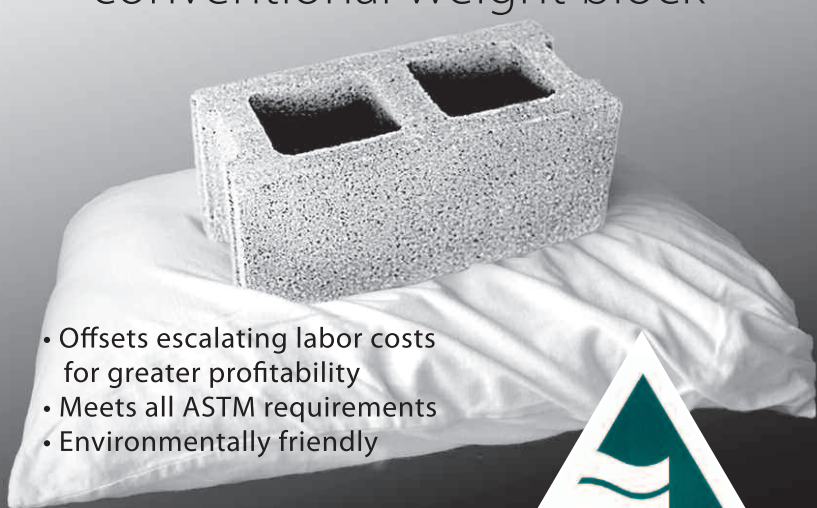


- Offsets escalating labor costs for greater profitability
- Meets all ASTM requirements
- Environmentally friendly

Products manufactured by:



NORTHFIELD BLOCK COMPANY
an Oldcastle Company



Big River Industries, Inc.
for MiTILite materials

PHENOLIC FOAM:

Introduced in the 70s and early 80s, it had a high R-value of 8.33/1". Unfortunately, it also caused steel corrosion upon contact with water. It was withdrawn from roofing and wall construction in the mid-1980s.

DESIGN CHALLENGES

The need for higher R-valued walls presented a design problem for architects. Traditionally architects designed buildings for commercial, industrial and residential applications. The most economical wall system in the past was solid masonry walls composed of three wythes (or layers) of brick and/or one wythe of brick tied into an 8" concrete masonry back up. The only place you could put rigid insulation in solid walls was on the inside of the building. This gave rise to the use of cavity walls composed of an exterior 4" brick wythe of masonry, a cavity consisting of an air space and closed cell rigid insulation and an interior wythe of the 8" concrete masonry. (Figure 2)

The history of cavity walls goes back many hundreds of years, but the greatest

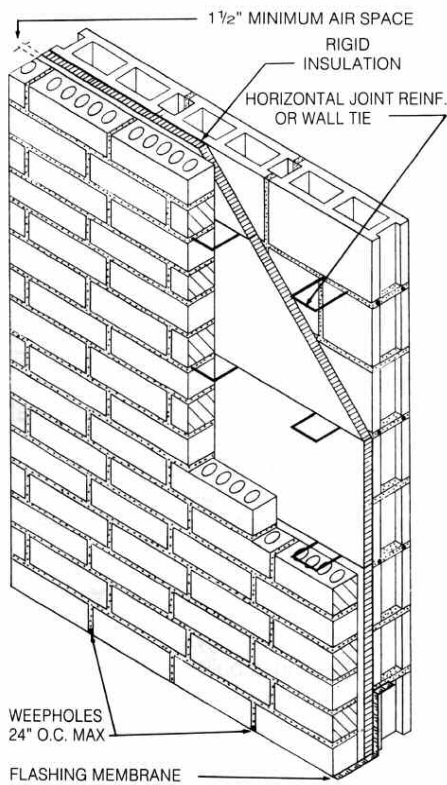


Figure 2. Typical cavity wall with insulation

Expanded Polystyrene (EPS)

ASTM C578 Standard Specification for Preformed Cellular Polystyrene Thermal Insulation – Expanded Polystyrene.

TYPE	XI	I	VIII	II	IX
R-VALUE / IN @ 75° F	3.1	3.6	3.8	4.0	4.2
DENSITY, MIN PCF	0.7	0.9	1.15	1.35	1.8
WATER ABSORPTION MAX, % BY VOL.	4	4	3	3	2
COMPRESSIVE STRENGTH MIN, PSI	5	10	13	15	25

Must be protected with 1/2" drywall. (15 minutes of fire protection or greater.)

Wherever there's an outstanding design,
Glen-Gery Brick will surface.

America's premier brickmaker, Glen-Gery offers an extensive range of genuine clay products—extruded, machine molded, Authentic Handmade, glazed and FBX facebrick, Thin Brick, pavers, and a complete line of standard and custom shape units. Quality craftsmanship backed by over a century of experience.

Dave Barnhart, Regional Sales Manager • 800-441-6911 • www.glengerybrick.com

Extruded Polystyrene (XPS)

ASTM C578 Standard Specification for Preformed Cellular Polystyrene Thermal Insulation – Extruded Polystyrene.

TYPE	X	IV	VI	VII	V
DENSITY, MIN., PCF	1.35	1.60	1.80	2.20	3.00
R-VALUE/INCH @75°F, MIN.	5.00	5.00	5.00	5.00	5.00
COMPRESSIVE STRENGTH, MIN., PSI	15	25	40	60	100
WVP, MAX. PERM FOR 1"	1.1	1.1	1.1	1.1	1.1
WATER ABSORPTION, MAX., %/VOL.	0.3	0.3	0.3	0.3	0.3


Must be protected with 1/2" drywall. (15 minutes of fire protection or greater.)

Most cavity applications use Type X or Type IV. All roof and interior wall systems incorporating extruded polystyrene insulation must consider adequate fire protection. Coverings such as 15 minute thermal barriers (1/2" drywall) or other alternatives based on building code diversified tests are regarded as acceptable in most applications.



The NEW Grout System

The NEW BMI Grout System consists of the silo that is pneumatically filled (no bags) with an attached fully automatic Grout Pump. BMI transports the silo with the pump to the jobsite. All the contractor has to do is hook up the hoses and pump. This allows the contractor to do the job more efficiently.

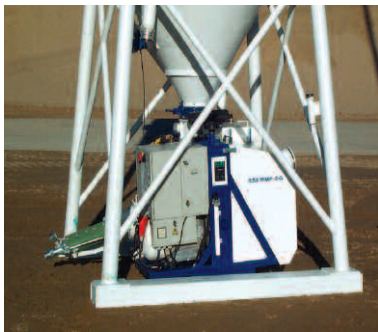

Pump on Silo

The Grout System is fully automatic. Water is injected into the drymix and the grout is pumped up to 500 ft. This system only requires three men to operate it, allowing the rest of the crew to lay block without interruption. BMI returns to the job site to refill the silo per the contractors request. This eliminates dealing with messy bags and helps increase production!



Grouting

BMI Products produces several different products. We manufacture Gray or Colored Mortars, Adhesives, Plaster, Stucco, Self Leveling Floor and can customize products to suit your every need. Give us a call today!

**BMI Products of Northern Illinois, Inc.
28919 W. Rt. 173
Antioch, IL 60002
P: (847) 395-7110 F: (847) 395-7105
www.bmi-products.com**



Insulation Myths & Deceptive Truths:

Several years ago, a large manufacturer of batt insulation produced television commercials comparing the insulative R-value of 6" of batt insulation to 15" of wood and to 84" of brick masonry. This was a deceptively true statement. However, neither wood nor masonry is marketed as an insulation material. The comparison of R-values of batt insulation to other types of insulation materials (2 1/2" of polyisocyanurate, or 3 1/2" of extruded polystyrene, or 4 1/4" of expanded polystyrene) was not made because the comparison would not favor the batt insulation manufacturer in the general public's perception. If the masonry industry had responded using the same illogic, you would have seen commercials on TV with the three little pigs building a brick house, and one little pig would be saying to his brother, "Do you realize it takes one half square mile of 6" batt insulation to have the same compressive strength of one square inch of brick masonry?"... After a five second pause, the other brother, with a questioning look on his face, would say "Did you have some bad beer last night?"...

Masonry is a structural and/or architectural material. You don't build buildings with just insulation. In the Midwest climate, the Masonry Advisory Council encourages the use of insulation with masonry. The masonry industry needs insulation with its product, with the exception of masonry used as a passive solar heat storage medium.

Fax your wall cross section and questions to Chuck Ostrander at 847-297-8373.

Most wall applications use Type I, class I or class II. Type II is used primarily in roofing applications. Thermax insulation by Dow can be installed exposed to the building interior, without a thermal barrier, in many applications. Foil – faced polyisocyanurate insulations may also provide an additional reflective R-Value of 2.8 when installed adjacent to a clean dead air space, per ASHRAE standards. (A non-reflective dead air space has a R-Value of 0.97).

impetus for its use is for a more rain resistant type of wall system compared to solid masonry. In addition, it was more energy efficient as a corollary. Below are various wall cross sections and the R-value of the total wall system including the insulation selected. It is hoped this is of assistance to you in designing energy efficient walls in the future. **ME**

Jonathan Satko joined The Dow Chemical Company in 2001 after serving as architectural systems manager for polyisocyanurate insulation products with the Celotex Corporation. He has been involved in the construction products industry since graduating from Western Illinois University with a BA in mass communications in 1989. Satko has been an associate member of the Construction Specifications Institute (CSI) and Association of Licensed Architects (ALA), and is currently associated with the Bloomington-Normal Illinois Chapter of the National Association of Home Builders (NAHB). jsatko@dow.com, 630-882-8164



Charles Ostrander is a graduate of the University of Illinois with a degree in civil engineering. He joined the Illinois Masonry Institute in 1978. Ostrander is a registered PE in the State of Illinois, a member of ASCE, a founding member in The Masonry Society and a past director in the Structural Engineers Association of Illinois. As executive director for the Illinois Masonry Institute, Ostrander is also an engineering consultant for programs developed by the Masonry Advisory Council and the Illinois Indiana Masonry Council. Ostrander is an author of numerous masonry articles and a guest lecturer at several universities. chuckostrander@yahoo.com, 847-297-6704



Polyisocyanurate (ISO)

ASTM C1289-2001 Standard Specification for Faced Rigid Cellulular Polyisocyanurate Thermal Insulation Board.

TYPE CLASS FACER	I I FOIL/FOIL	I II FOIL/FOIL	II I FELT OR GLASS	II II POLYMER BONDED
R-VALUE/INCH@75°	6.5	6.5	5.6	5.3
COMPRESSIVE STRENGTH, MIN. PSI	20	20		20
GRADE I			20	
GRADE II			20	
GRADE III			25	
WVP, MAX. PERM FOR 1"	0.3	0.3	1.0	4.0
WATER ABSORPTION MAX. %/VOL	1.0	1.0	1.5	1.5



Communities by design

Meet the highest of expectations

*Fullface Split concrete masonry units
St. Mary's St. Antonius Coptic Orthodox Church
Oak Creek, Wisconsin*



*Acoustade® sound absorbing masonry units
Green Bay Community Church
Green Bay, Wisconsin*

Concrete masonry is the ultimate building and decorating material. Discriminating architects and builders select it for structures that require distinction and long-lasting strength. Combined with its ready availability, competitive pricing and a broad variety of colors and facing styles to choose from, concrete masonry from County Materials offers unrivaled versatility.

See the latest in our innovative and high quality concrete masonry and product solutions for growing communities.

- Thin Veneers
- Concrete Brick
- Clay Brick
- Precast Concrete Brick

- Tumbled & Sculpted Masonry
- Decorative Concrete Masonry
- Oversize Concrete Units

- Burnished and Glazed Block
- Natural and Manufactured Stone Veneers
- Sound Absorbing Units

Chicago

2217 South Loomis St. • (312) 421-8432
1430 North Elston Ave. • (773) 489-2423

Champaign

702 N. Edwin St. • (217) 352-4181
1017½ W. Bloomington Rd. • (217) 352-3350




COUNTY
MATERIALS CORPORATION

Proud to be American based & American made


www.countymaterials.com

R-VALUE OF VARIOUS WALL CROSS SECTIONS OF

BRICK VENEER OVER 4" WOOD FRAME CONSTRUCTION

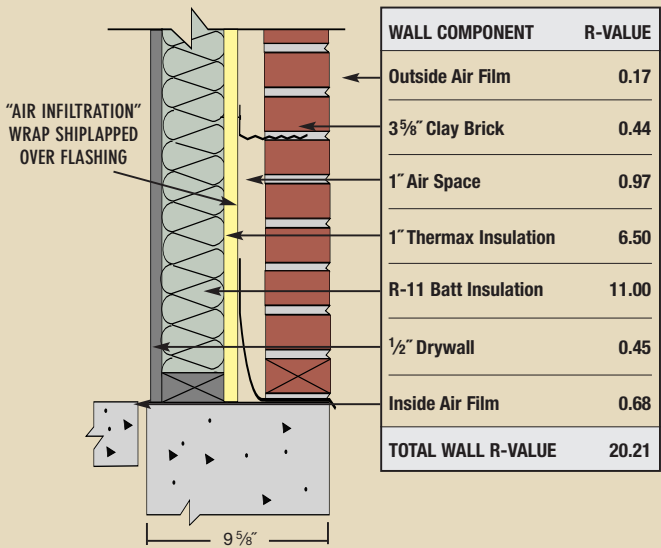


BRICK VENEER OVER 6" WOOD FRAME CONSTRUCTION

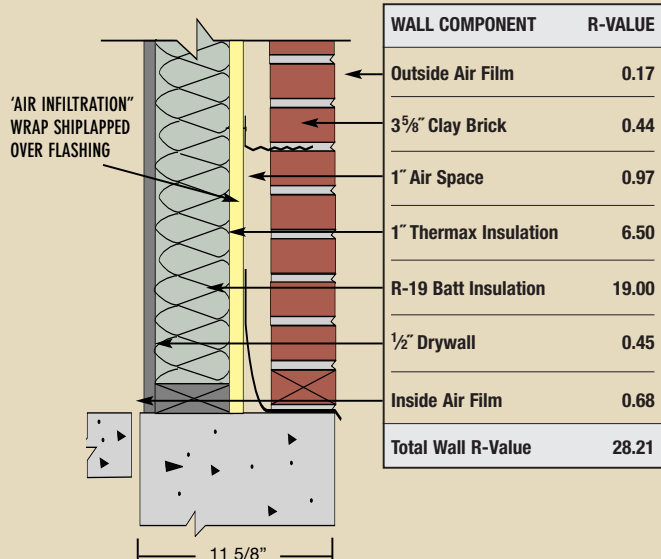

INSPIRING VARIETY OF BRICK & STONE FOR YOUR DISTINCTIVE PROJECTS

from the little guy you like to deal with...



NIBS

NORTHERN ILLINOIS BRICK & SUPPLY

OFFERING

- product knowledge
- personalized services
- extensive network of top-rated suppliers
- color and style matching for brick & stone of any age
- products spotted for efficient mason use
- impressive on-time delivery performance

BOWERSTON SHALE • CLOUD CERAMICS • CULTURED STONE • DUFFERIN STONE • ELDORADO STONE • GLEN GERY BRICK • JENKINS BRICK • KANSAS BRICK & TILE • LAKEWOOD BRICK & TILE • MUTUAL MATERIALS • NATURAL STONE VENEERS • PINE HALL BRICK & PAVERS • RADEMANN STONE • REDLAND BRICK • RICHARDS BRICK • ROBINSON BRICK • ROCKWOOD • SIOUX CITY BRICK • STREATOR BRICK • SUMMIT BRICK & TILE BRICK • SPLIT FACE BLOCK • CUSTOM CAST LIMESTONE • STONE VENEER • PAVING & RETAINING WALL MATERIALS • MASONRY SUPPLIES



ELGIN
 39W180 Highland Ave.
 847-468-0091
 847-468-0116 fax


MOKENA
 18911 S. Wolf Rd
 708-479-5858
 708-479-5826 fax

www.northernillinoisbrick.com

THE TOTAL WALL SYSTEM INCLUDING INSULATION


BRICK VENEER OVER STEEL STUDS WITH BATT INSULATION

*TAKING INTO ACCOUNT STEEL STUD THERMAL SHORTING AND ASHRAE 90.1 CORRECTION FACTORS

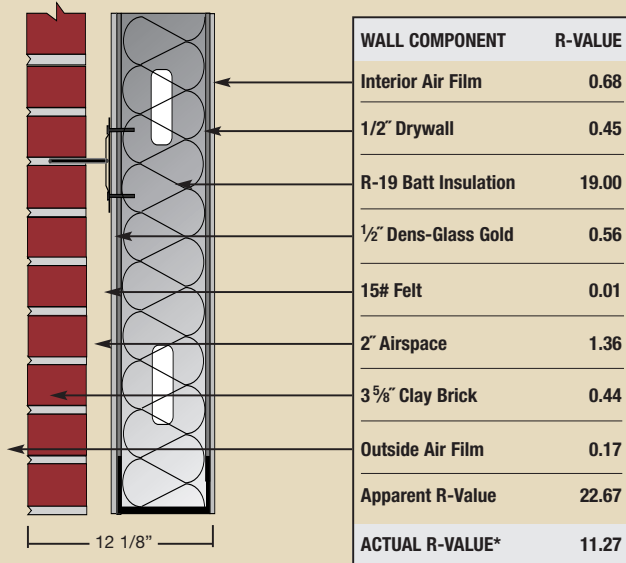

BRICK VENEER OVER STEEL STUDS WITH EXTERIOR RIGID INSULATION

*TAKING INTO ACCOUNT STEEL STUD THERMAL SHORTING AND ASHRAE 90.1 CORRECTION FACTORS

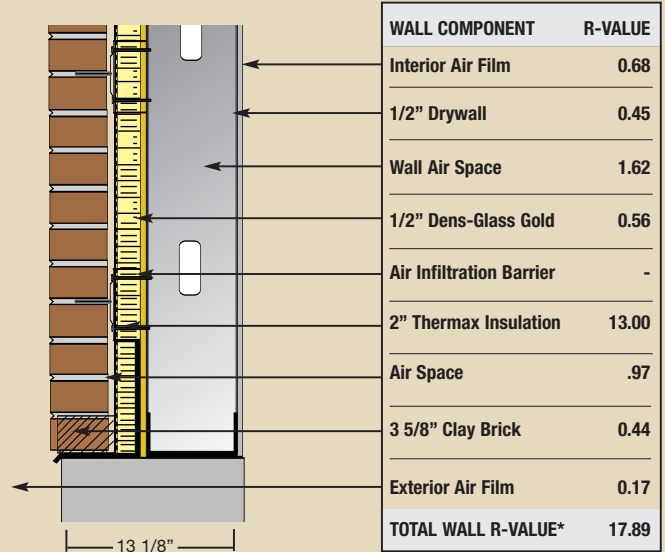

EFFICIENT SAFE ERGONOMIC

New P-Series Machine

- Single Mast Set-up
- 10 ft Per Minute Speed
- Quick & Easy Assembly



EQUIPMENT CO.
"We Make It Happen!"



- Indiana's #1 Choice of hydraulic scaffolding
- Offering efficiency to increase productivity


Indiana's Authorized Distributor




RENTAL | SALES | SERVICE **800-827-6846**

6677 Broughton Ave.
Columbus, OH 43213
Fax 614-882-0751

1980s TRADITIONAL CAVITY WALL

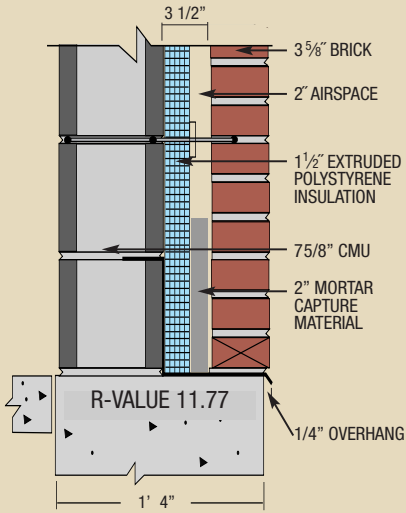


CAVITY WALL R-VALUES WITH VARIOUS INSULATION CONFIGURATIONS

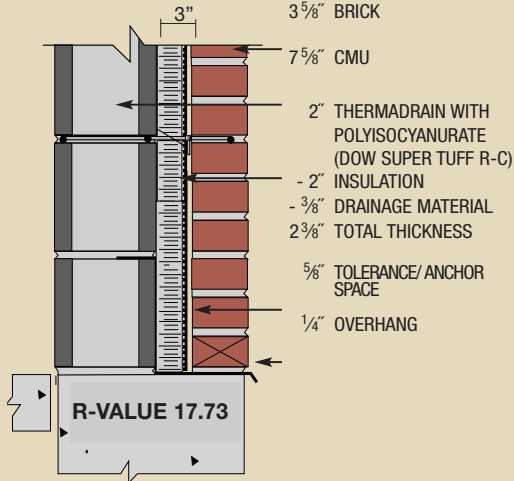


R-Value of wall using Polyisocyanurate
1 1/2" - 14.52
2" - 17.73
2 1/2" - 20.53
R-Value of wall using Extruded Polystyrene
1 1/2" - 11.77
2" - 14.27
2 1/2" - 16.77

SOLID COMPOSITE MASONRY WALL

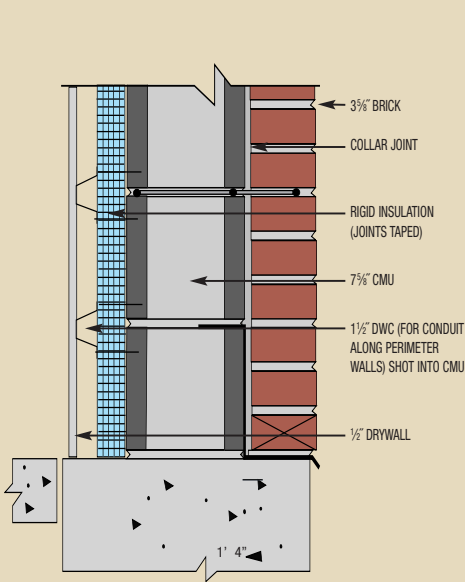

R-Value of Wall Using Polyisocyanurate	
1 1/2"	15.93
2"	19.13
2 1/2"	21.93
R-Value of Wall Using Extruded Polystyrene	
1 1/2"	11.81
2"	14.31
2 1/2"	16.81
3"	19.31
R-Value of Wall Using Expanded Polystyrene	
1 1/2"	10.31
2"	12.31
2 1/2"	14.31
3"	16.31

SINGLE WYTHE CONCRETE UNITS HARVARD BRICK / HERITAGE BRICK

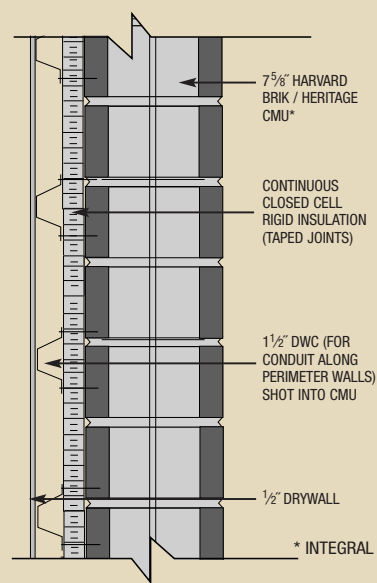


R-Value of Wall Using Polyisocyanurate	
2"	18.7
2 1/2"	21.5
R-Value of Wall Using Extruded Polystyrene	
2"	13.87
2 1/2"	16.37
3"	18.87

* INTEGRAL WATER REPELLENT IN CMU AND MORTAR


**4" SINGLE WYTHE
HOLLOW REINFORCED BRICK**

R-Value of Wall Using Thermax	
2"	14.52
2 1/2"	17.32

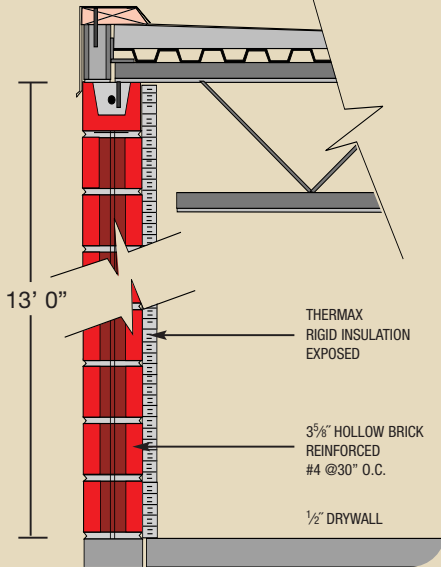

**6" SINGLE WYTHE
HOLLOW REINFORCED BRICK**

R-Value of Wall Using Thermax	
2"	14.89
2 1/2"	17.69

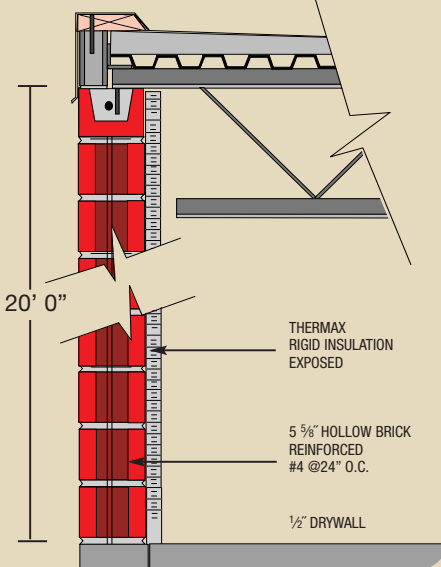

**Building America's dream retreat...
...one stone at a time.**

Shown:
Dimensional
Chalet Grey

ROCKING AMERICA SINCE 1929

**HALQUIST
STONE**

800.255.8811
halquiststone.com

For nearly 80 years, the name Halquist has been synonymous with stone. Quarrying throughout Wisconsin and the Upper Peninsula, we make it easy to select the right stone for your building, remodeling and landscaping projects.

Halquist Stone...your #1 source for stone!

J. and E. DUFF
INC.
Mason Contractors
providing quality masonry construction since 1936

Commercial, Industrial, Institutional,
Multi-Family and Retail Construction.

Mail: P.O. Box 368, West Chicago, IL 60186
Ship: 909 W. Washington St., West Chicago, IL 60185
Phone: (630) 562-3800 ♦ Fax: (630) 562-3801
Email: info@jeduff.com